



## 2SPA-M

公制可开型直接头

*Divisible fitting, straight, metric*



### IP-防护等级 IP-Protection class

#### IP44

- └─ 防护泼水  
*Protected against  
splashing water*
- └─ 防护直径 1 mm 以上的  
物质  
*Protected against solid  
objects over 1 mm*

#### 材料: PA6 MOD BS SGA

公制可开型直接头 2SPA-M 由特殊改性尼龙 6 材料制成, 与 FIP SPLIT® 波纹管配合使用。2SPA-M 配合可开型锁紧螺母非常适合用于线缆线束已经安装好但需要重新调整的场所。

#### Material: PA6 MOD BS SGA

Our straight divisible metric fitting 2SPA-M, made of specially formulated Polyamide 6, properly suits with the divisible FIP SPLIT® conduit. 2SPA-M allows an easy retrofit application on existing installations with thread fastening capability also with available divisible locknuts.

## 2SPAM

### 产品性能 / Product performances

应用性能 / Application performances	特性 Characteristics	单位 Unit	规范标准 Standards, specifications	备注 Remark
温度范围 Temperature range	-45 到 / to +120 -49 到 / to +248	°C °F	IS FIP	
温度(短周期) Temperature (short-term)	+140 + 284	°C °F	IS FIP	
<b>防火性能 / Fire safety performances</b>				
不含卤素和镉 Free from halogens and cadmium	是 / yes			
阻燃等级 Fire classification	V2		UL 94	1,6 mm
灼热丝测试 Glow wire test	850 1562	°C °F	EN60695-2-10	
氧指数 Oxygen index	>28	%	EN ISO 4589-2	
<b>系统密封性能 / System performances</b>				
IP 等级 Ingress protection (IP)	IP44		EN60529	



测试条件参照EN ISO 139温度23°C, 湿度 / 50% (如未注明测试条件)。IS FIP = FIP内部测试规范。  
 Tests carried out acc. EN ISO 139 at 23°C/50% r. h. (if not indicated different). IS FIP = Internal Specification FIP

产品号 Part No.		名义尺寸 Nominal width	螺纹尺寸 Thread size	尺寸 (mm) Dimensions in mm (nom.)						包装单元 PU
黑色 / black	灰色 / grey	NW	公制 / metric	A	T	ID	M	外径 / OD	SW	m
2SPA-10M16PB	2SPA-10M16PG	10	M16	34,0	11,0	11,0	16x1,5	21,0	19,0	10
2SPA-14M20PB	2SPA-14M20PG	14	M20	41,0	11,0	14,6	20x1,5	29,0	27,0	10
2SPA-20M25PB	2SPA-20M25PG	20	M25	43,0	12,0	19,0	25x1,5	35,0	32,0	10
2SPA-23M32PB	2SPA-23M32PG	23	M32	50,5	15,0	26,0	32x1,5	44,0	40,0	10
2SPA-37M40PB	2SPA-37M40PG	37	M40	59,0	19,0	32,0	40x1,5	53,0	48,0	10
2SPA-45M50PB	2SPA-45M50PG	45	M50	69,5	21,0	42,0	50x1,5	69,0	64,0	10

关于产品库存, 交期, 尺寸及颜色等问题请联系我们本地的经销商或客服。

Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.

## 产品代码 / Number code:

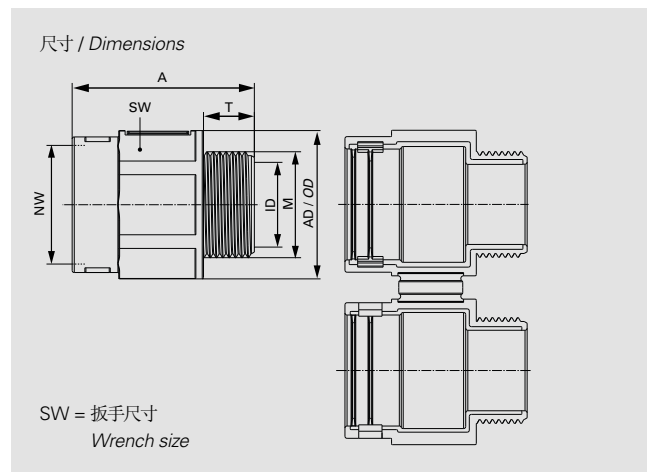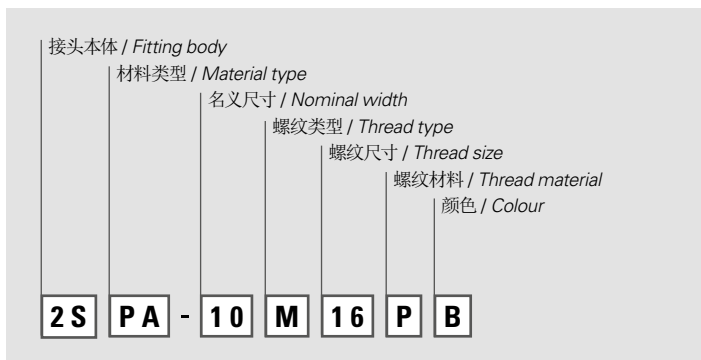

我们尽我们的知识水平所提供的数据, 图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估, 以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权力。例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.