


DMTN

金属软管

Metal conduit, overbraided



材料: 镀锌钢, 外包镀锌钢丝编织管

柔性镀锌钢金属软管DMTN 由特殊的连接方式连接, 外包镀锌钢丝编织管。编织管提供了额外的抗拉伸, 扭转和压缩的防护。DMTN可应用于需要额外保护电缆或线束的重工业, 发电厂或电气领域。

Material: Galvanized steel, overbraided with galvanized steel wires

The flexible galvanized carbon steel conduit DMTN with special seam is overbraided with a galvanized steel wire. This gives extra protection against traction, torsion and compression. DMTN can be applied to heavy industry, power plants or applications, where cables and wires need to be additionally protected.

DMTN



产品性能 / Product performances

应用性能 / <i>Application performances</i>	特性 <i>Characteristics</i>	单位 <i>Unit</i>	规范标准 <i>Standards, specifications</i>	备注 <i>Remark</i>
温度范围 <i>Temperature range</i>	-45 到 / <i>to</i> +250 -49 到 / <i>to</i> +482	°C °F	IEC EN 61386	
机械性能 / <i>Mechanical performances</i>				
冲击强度 <i>Impact strength</i>	6	J	IEC EN 61386	
峰值负载 <i>Peak load</i>	1250	N	IEC EN 61386	
防火性能 / <i>Fire safety performances</i>				
不含卤素和镉 <i>Free from halogens and cadmium</i>	是 / <i>yes</i>			
产品防火特性 <i>Fire characteristic of the product</i>	自熄 <i>self-extinguishing</i>		IEC EN 61386	
烟雾浓度和毒性 <i>Smoke density and toxicity</i>	F1		UNI CEI 11170-3	
耐候性 / <i>Weathering performances</i>				
UV及耐候性 <i>UV and weathering performance</i>	非常好 <i>very good</i>			


测试条件参照EN ISO 139 温度23°C, 湿度 / 50% (如未注明测试条件)。IS FIP= FIP内部测试规范
 Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated different). IS FIP= Internal Specification FIP

产品号 Part No.		名义尺寸 Nominal width	重量 Weight	尺寸 (mm) Dimensions in mm (nom.)		弯曲半径 Bending radius	每卷长度 Reel length
FIP	EURO 2000	NW	+/- 4% gr/mt	ID.	外径 / OD	mm	m
MC-DMTN-210.30	DMTN-210	10	233	10,0	14,5	40	30
MC-DMTN-212.30	DMTN-212	12	300	12,0	16,8	50	30
MC-DMTN-216.30	DMTN-216	15,5	367	15,5	20,0	55	30
MC-DMTN-221.30	DMTN-221	20,5	472	20,5	25,3	60	30
MC-DMTN-227.30	DMTN-227	26,5	631	26,5	30,3	85	30
MC-DMTN-235.30	DMTN-235	34,5	784	34,5	40,6	120	30
MC-DMTN-240.25	DMTN-240	39,5	889	39,5	45,6	160	25
MC-DMTN-250.25	DMTN-250	50,5	1087	50,5	57,1	200	25

关于产品库存，交期，尺寸及颜色等问题请联系我们本地的经销商或客服。
Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.

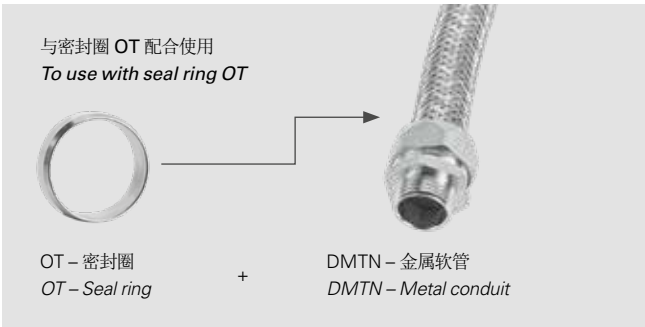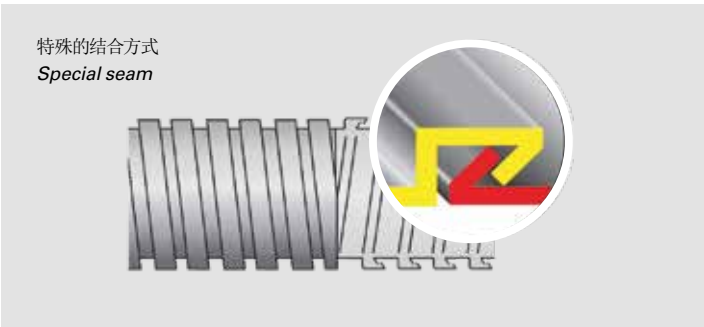

产品代码 / Number code:

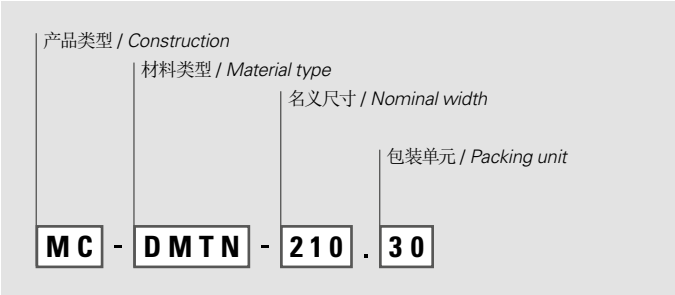

我们尽我们的知识水平所提供的数据，图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估，以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权力。例如更改材料和加工工艺，在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.