



## ME-2-TR-M

柔性公制弯头

*Flexible curved elbow fitting, metric*



材料: 镀镍黄铜, 管子材料 **AISI 304** 不锈钢

FIPMETAL® 柔性公制弯头的柔性设计, 使与之搭配管子的选择变得非常容易。虽然产品具有非常好的柔韧性, 但仍然保证了产品应有的刚度。弯头连接器采用公制螺纹连接, 并且使连接后的密封等级达到IP68。

**Material: Brass nickel plated, conduit stainless steel AISI 304**

*The particularly flexible section of the FIPMETAL® elbow connector allows for pipe runs to be freely selected. Despite the flexibility, how-ever, the inherent stiffness of the flexible angle section is maintained and the direction of the pipe run is secured. The elbow connector features a metric thread and provides up to IP68 tightness, depending on the type of pipe.*

## ME-2-TR-M

### 产品性能 / Product performances

应用性能 / <i>Application performances</i>	特性 <i>Characteristics</i>	单位 <i>Unit</i>	规范标准 <i>Standards, specifications</i>	备注 <i>Remark</i>
温度范围 <i>Temperature range</i>	-45 到 / to +120 -49 到 / to +248	°C °F	IEC EN 61386	
温度 (短周期) <i>Temperature (short-term)</i>	140 284	°C °F	IS	
<b>机械性能 / <i>Mechanical performances</i></b>				
IP 防护性能 <i>IP Protection range</i>	可达 IP67 <i>up to IP67</i>		EN 60529	
拔脱强度 <i>Pull-out strength</i>	高 <i>high</i>		IS	
抗震动强度 <i>Vibration strenght</i>	非常好 <i>very good</i>		IS	
<b>防火性能 / <i>Fire safety performances</i></b>				
产品防火特性 <i>Fire characteristic of the product</i>	不易燃 <i>not flammable</i>			
<b>耐候性 / <i>Weathering performances</i></b>				
抗腐蚀性 <i>Resistant to corrosion</i>	符合 <i>compliant</i>		ISO 9227 / DIN 50017SK	

测试条件参照 EN ISO 139 温度 23°C, 湿度 / 50% (如未注明测试条件)。IS FIP = FIP 内部测试规范  
 Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated different). IS FIP = Internal Specification FIP

产品号 Part No.		螺纹类型 Thread type	适配管子尺寸NW Fits to conduit NW	尺寸 (mm) Dimensions in mm (nom.)		螺纹长度 L Thread length L	包装单元 PU
FIP	EURO 2000	公制 / metric	NW	D	C	mm	个 / Pcs
ME-210-53141-TR	53141-Tr,210	M16x1,5	10,0	22,0	20,0	9	20
ME-212-53142-TR	53142-Tr,212	M16x1,5	12,0	26,0	24,0	9	20
ME-212-53143-TR	53143-Tr,212	M20x1,5	12,0	26,0	24,0	9	20
ME-216-53144-TR	53144-Tr,216	M20x1,5	15,5	29,0	27,0	9	10
ME-221-53145-TR	53145-Tr,221	M25x1,5	20,5	35,0	33,0	9	5
ME-227-53146-TR	53146-Tr,227	M32x1,5	26,5	45,0	43,0	11	1
ME-235-53147-TR	53147-Tr,235	M40x1,5	34,5	54,0	52,0	11	1
ME-240-53148-TR	53148-Tr,240	M50x1,5	39,5	62,0	60,0	14	1
ME-250-53149-TR	53149-Tr,250	M63x1,5	50,5	77,0	74,0	14	1


关于产品库存, 交期, 尺寸及颜色等问题请联系我们本地的经销商或客服。

Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.

**安装说明 / Assembling instruction:**



**产品代码 / Number code:**

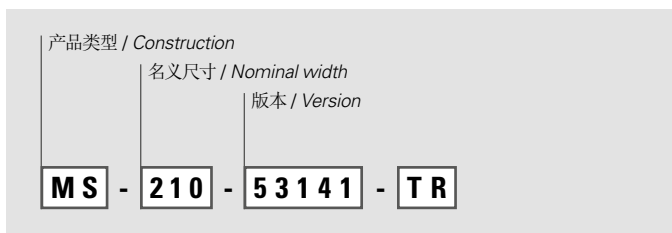

我们尽我们的知识水平所提供的数据, 图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估, 以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权利。例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.