

NKPA

边缘保护螺母


Edge protection nut



NFPA
130



HALOGEN
FREE



材料: PA6 MOD V0 SGA

FIPLOCK® NKPA 是一种用于FIPLOCK® ONE接头的公制螺纹边缘保护螺母, 适用于高震动场合用于保护线缆束不被磨损。

Material: PA6 MOD V0 SGA

FIPLOCK® NKPA is a metric edge protection counter lock nut for FIPLOCK® ONE fittings and can be used for higher abrasion application as well as for close bending radii to protect cables and wires specifically.

NKPA

产品性能 / Product performances

应用性能 / Application performances	特性 Characteristics	单位 Unit	标准规范 Standards, specifications	备注 Remark
温度范围 Temperature range	-50 到 / to +120 -58 到 / to +248	°C °F	IS FIP	
温度 (短周期) Temperatur (short-term)	150 (500 h); 160 (100 h) 302 (500 h); 320 (100 h)	°C °F	IS FIP	
材料性能 / Material performances				
缺口冲击测试 Notched bar impact test	7 – 25	kJ/m²	ISO 180	
防火性能 / Fire safety performances				
不含卤素和镉 Free from halogens and cadmium	是 / yes			
阻燃等级 Fire classification	V0		UL 94	
产品防火特性 Fire characteristic of the product	自熄 self-extinguishing		UL 1696	
氧指数 Oxygen index	>32	%	EN ISO 4589-2	
灼热丝测试 Glow wire test	960 1760	°C °F	IEC 60695	
火灾危害等级 Fire hazardous level	HL3 R22 HL3 R23		EN45545-2	
火焰蔓延指数 Flame spread index	符合 compliant		ASTM E162	参照 /acc. NFPA 130
烟雾浓度 Smoke density	符合 compliant		ASTM E662	参照 /acc. NFPA 130
烟雾毒性 Smoke toxicity	符合 compliant		BSS 7239/SMP 800-C	
热释放量 (焓) Heat release (Enthalpy)	19,4 (8265)	MJ/kg (BTU/lb)	ASTM E1354	50 kW/m² 热通量 / heat flux
火焰蔓延 Spread of fire	非火焰蔓延 non flame propagating		IEC EN 61386	
耐候性 / Weathering performances				
UV及耐候性 UV and weathering performance	优异 excellent		IS FIP	可达40年 up to 40 years



测试条件参照EN ISO 139温度23°C, 湿度 / 50% (如未注明测试条件)。IS FIP=FIP内部测试规范。

Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated different). IS FIP = Internal Specification FIP

产品号 Part No.		螺纹尺寸 Thread size	尺寸(mm) Dimensions in mm (nom.)					每件重量 Weight per piece	包装单位 PU
黑色 / black	灰色 / gray		L	ØA	B	ID	SW	g	个 / Pcs
NKPA-M16B	NKPA-M16G	M16	4,5	21,0	10,5	9,4	18,8	2,0	10
NKPA-M20B	NKPA-M20G	M20	4,5	26,0	10,5	13,5	23,8	2,9	10
NKPA-M25B	NKPA-M25G	M25	4,5	33,0	11,0	18,0	29,7	4,6	10
NKPA-M32B	NKPA-M32G	M32	5,0	39,0	12,0	24,0	35,7	6,3	6
NKPA-M40B	NKPA-M40G	M40	5,0	50,0	12,5	32,0	45,7	10,5	6

关于产品库存, 交期, 尺寸及颜色等问题请联系我们本地的经销商或客服。
Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.

产品代码 / Number code:

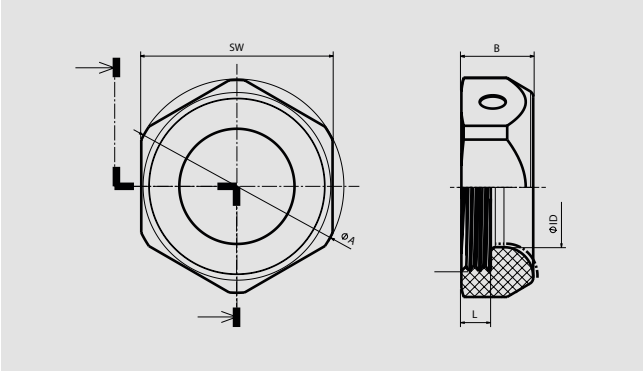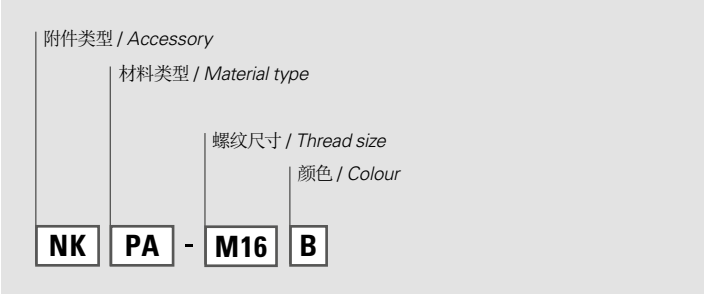

我们尽我们的知识水平所提供的数据, 图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估, 以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权力。例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.