


PTTP

管路末端保护套

Conduit termination sleeve



	min.					max.
温度范围 <i>Temperature range</i>						
柔韧性 <i>Flexibility/Ductility</i>						
动态性能 <i>Dynamic</i>						
机械保护性能 <i>Mechanical protection</i>						
防火性能 <i>Fire precaution performance</i>						
耐化学性 <i>Chemical resistance</i>						
耐候性 <i>Resistance to weathering</i>						

材料: TPE

带弹性的管路末端保护套由热塑性弹性体材料TPE制成，材料自熄并且不含卤素。主要用于防止赃物或灰尘由末端进入管路。PTTP可以按照需要的尺寸切割，以适应线缆或线束的外径，保证线缆与保护套安装牢固。PTTP颜色为黑色，适用于细波型和粗波型波纹管。

Material: TPE

The elastic conduit termination sleeve, made of thermoplastic elastomer material (TPE), is self-extinguishing, free-halogen and protects conduits against ingress of dirt and dust. PTTP can be cut to fit onto the desired diameter of the applied cable or cable bundle and must be installed tightly. PTTP suits to conduits with fine and coarse profiles and available in standard colour black.

PTTP

产品性能 / Product performances

应用性能 / Application performances	特性 Characteristics	单位 Unit	规范标准 Standards, specifications	备注 Remark
温度范围 Temperature range	-40 到 / to +120 -40 到 / to +248	°C °F	IEC EN 61386	
防火性能 / Fire safety performances				
不含卤素和镉 Free from halogens and cadmium	是 / yes			
阻燃等级 Fire classification	V0		UL 94	
易燃性 Flammability	自熄 self-extinguishing		FMVSS 302	
火焰蔓延 Spread of fire	非火焰蔓延 non flame propagating		IEC EN 61386	
耐候性 / Weathering performances				
UV及耐候性 UV and weathering performance	好 average to good		IS FIP	5 到 10 年 5 to 10 years


测试条件参照EN ISO 139 温度23°C, 湿度 / 50% (如未注明测试条件)。IS FIP= FIP内部测试规范
 Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated different). IS FIP= Internal Specification FIP

产品号 Part No.	名义尺寸 Nominal width	尺寸 (mm) Dimensions in mm (nom.)		宽度 Width	高度 Height	重量 Weight	包装单位 PU
schwarz / black	NW	ØA	B	ØE	mm	in g	个 / Pcs
PTTP-04B	04	11,0	17,8	6,3	0,8	0,4	10
PTTP-07B	07	15,9	23,5	9,2	1,0	0,9	10
PTTP-10B	10	18,6	27,5	11,9	1,0	1,3	10
PTTP-12B	12	22,5	32,5	14,8	1,0	1,9	10
PTTP-17B	17	28,8	35,0	20,0	1,0	2,8	10
PTTP-23B	23	36,1	40,0	27,0	1,0	4,1	6
PTTP-29B	29	42,2	40,2	33,1	1,2	6,2	6
PTTP-36B	36	49,8	48,2	40,6	1,2	8,9	4
PTTP-48B	48	61,8	48,2	52,7	1,2	12,0	4


关于产品库存，交期，尺寸及颜色等问题请联系我们本地的经销商或客服。

Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.


产品代码 / Number code:

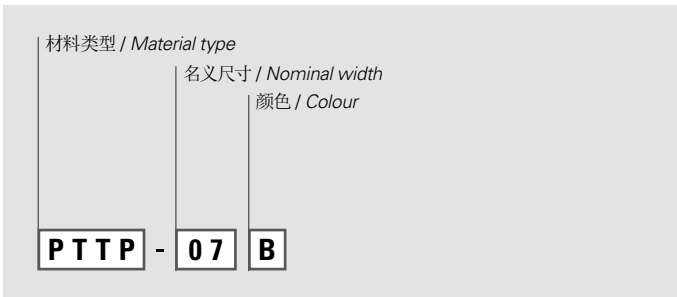

尺寸 / Dimensions:

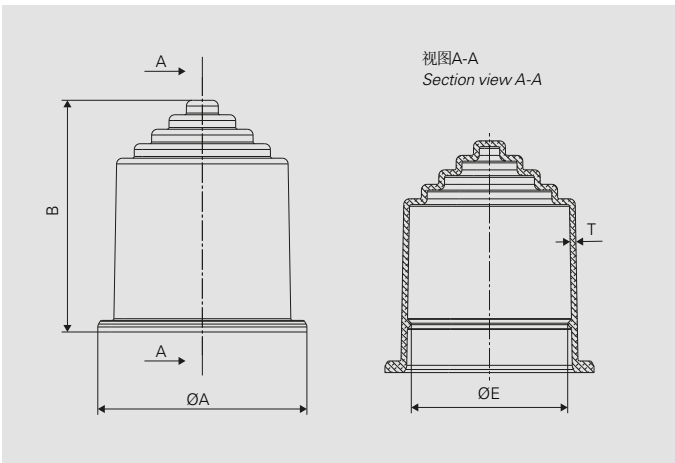

适用于 / Suitable to:

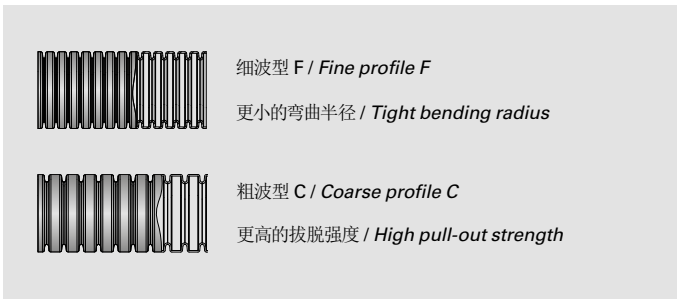

我们尽我们的知识水平所提供的数据，图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估，以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权力。例如更改材料和加工工艺，在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.