



### WPET-SCF

高阻燃自卷钩织管

*Woven hose, selfclosing, high flame resistant*

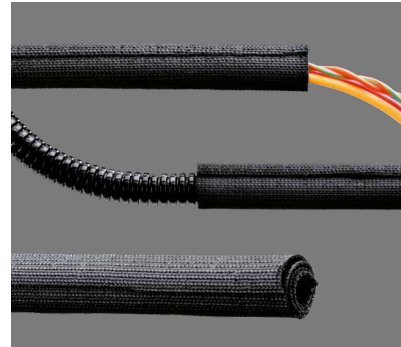

|                                     | min. |  |  |  | max. |
|-------------------------------------|------|--|--|--|------|
| 温度范围<br>Temperature range           |      |  |  |  |      |
| 柔韧性<br>Flexibility/Ductility        |      |  |  |  |      |
| 动态性能<br>Dynamic                     |      |  |  |  |      |
| 机械防护性能<br>Mechanical protection     |      |  |  |  |      |
| 防火性能<br>Fire precaution performance |      |  |  |  |      |
| 耐化学品性能<br>Chemical resistance       |      |  |  |  |      |
| 耐候性能<br>Resistance to weathering    |      |  |  |  |      |

#### Material: PET V0

WPET-SCF 是一款可自卷的钩织套管,由具有优异防火特性的PET材料编织而成。可为线缆束捆扎提供高效便捷的解决方案。此编织套管可开合,切割方便,且耐磨。WPET-SCF自卷管可以让线缆束从中间位置单独穿出。

#### Material: PET V0

WPET-SCF is a self-wrapping and overlapping fabric tape with improved fire characteristics and the perfect solution for a cost efficient easy bundling of cables and wires. The wrapped sleeves made of polyester can be reopened and offers excellent cut and chafing resistance. The self-wrapping feature of WPET-SCF allows cable and wire bundling with intermediate exits of individual conductors.

## WPET-SCF

产品性能 / *Product performances*


| 应用性能<br><i>Application performances</i>         | 特性<br><i>Characteristics</i>                     | 单位<br><i>Unit</i>   | 规范标准<br><i>Standards, specifications</i> | 备注<br><i>Remark</i> |
|-------------------------------------------------|--------------------------------------------------|---------------------|------------------------------------------|---------------------|
| 温度范围<br><i>Temperature range</i>                | -55 到 / <i>to</i> +150<br>-67 到 / <i>to</i> +302 | °C<br>°F            | IS FIP                                   |                     |
| 防火性能 / <i>Fire safety performances</i>          |                                                  |                     |                                          |                     |
| 不含卤素和镉<br><i>Free from halogens and cadmium</i> | 是 / <i>yes</i>                                   |                     |                                          |                     |
| 阻燃等级<br><i>Fire classification</i>              | V0                                               |                     | UL 94                                    |                     |
| 火灾危害等级<br><i>Fire hazard level</i>              | R22 HL3/R23 HL 3                                 |                     | EN 45545-2                               |                     |
| 机械性能 / <i>Mechanical performances</i>           |                                                  |                     |                                          |                     |
| 耐磨性能<br><i>Abrasion resistance</i>              | >5.000                                           | 循环<br><i>cycles</i> | according to LV312-3 /<br>ISO6722        |                     |

测试条件参照EN ISO 139, 温度23°C, 湿度 50%(如未注明测试条件)。IS FIP = FIP内部测试规范。  
Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated different). IS FIP = Internal Specification FIP

| 产品号<br>Part No. |                | 名义尺寸<br>Nominal width | 应用范围<br>Application range | 包装单元<br>PU |
|-----------------|----------------|-----------------------|---------------------------|------------|
| 黑色 / black      | 灰色 / grey      | NW                    | mm                        | m          |
| WPET-SCF08B.50  | WPET-SCF08G.50 | 08                    | 5 – 8                     | 50         |
| WPET-SCF10B.50  | WPET-SCF10G.50 | 10                    | 8 – 10                    | 50         |
| WPET-SCF13B.50  | WPET-SCF13G.50 | 13                    | 10 – 13                   | 50         |
| WPET-SCF16B.25  | WPET-SCF16G.25 | 16                    | 13 – 16                   | 25         |
| WPET-SCF19B.25  | WPET-SCF19G.25 | 19                    | 16 – 19                   | 25         |
| WPET-SCF25B.25  | WPET-SCF25G.25 | 25                    | 22 – 25                   | 25         |
| WPET-SCF29B.25  | WPET-SCF29G.25 | 29                    | 26 – 29                   | 25         |
| WPET-SCF32B.25  | WPET-SCF32G.25 | 32                    | 29 – 32                   | 25         |
| WPET-SCF38B.25  | WPET-SCF38G.25 | 38                    | 32 – 44                   | 25         |
| WPET-SCF50B.25  | WPET-SCF50G.25 | 50                    | 44 – 50                   | 25         |

关于产品库存, 交期, 尺寸及颜色等问题请联系我们本地的经销商或客服。  
*Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.*

产品代码 / Number code:

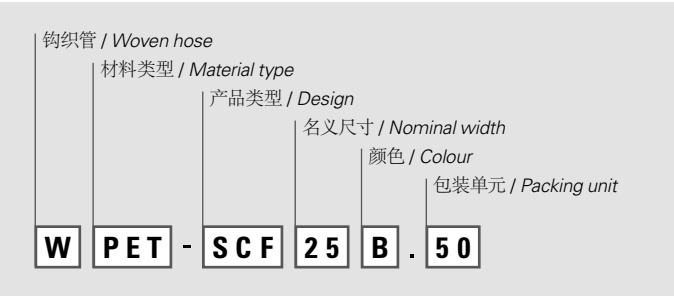

我们尽我们的知识水平所提供的数据, 图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估, 以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权力。例如更改材料和加工工艺, 在保证产品性能数值不下降的情况下不会另行通知。

*The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.*