



PETP

管路边缘保护套

Conduit edge protection



材料: TPE

带弹性的管路边缘保护套由热塑性弹性体材料TPE制成，材料自熄并且不含卤素。主要用于线缆或线束在管路出口处保持绝缘。PETP装配时必须确保装配牢固。在管路末端装上PETP还可以保护线缆或线束在震动时不被损坏。PETP颜色为黑色，非常容易安装在细波型或粗波型波纹管上。

Material: TPE

The elastic conduit edge protection, made of thermoplastic elastomer (TPE), is self-extinguishing, free-halogen and protects sensitive cable and wire insulation at the conduit exit. PETP must be installed tightly. Cutting edges at the conduit ends are covered and damaging of the cables and wires at vibrations and heavy movements can be avoided. PETP is easy to install on conduits with fine and coarse conduit profiles and available in standard colour black.

PETP

产品性能 / Product performances

应用性能 / <i>Application performances</i>	特性 <i>Characteristics</i>	单位 <i>Unit</i>	规范标准 <i>Standards, specifications</i>	备注 <i>Remark</i>
温度范围 <i>Temperature range</i>	-40 到 / <i>to</i> +120 -40 到 / <i>to</i> +248	°C °F	IEC EN 61386	
防火性能 / <i>Fire safety performances</i>				
不含卤素和镉 <i>Free from halogens and cadmium</i>	是 / <i>yes</i>			
阻燃等级 <i>Fire classification</i>	V0		UL 94	
易燃性 <i>Flammability</i>	自熄 <i>self-extinguishing</i>		FMVSS 302	
火焰蔓延 <i>Spread of fire</i>	非火焰蔓延 <i>non flame propagating</i>		IEC EN 61386	
耐候性 / <i>Weathering performances</i>				
UV及耐候性 <i>UV and weathering performance</i>	好 <i>average to good</i>		IS FIP	5 到 10 年 <i>5 to 10 years</i>


测试条件参照EN ISO 139 温度23°C, 湿度 / 50% (如未注明测试条件)。IS FIP= FIP内部测试规范
 Tests carried out acc. EN ISO 139 at 23°C / 50% r. h. (if not indicated different). IS FIP= Internal Specification FIP

产品号 Part No.	名义尺寸 Nominal width	尺寸 (mm) Dimensions in mm (nom.)					重量 Weight	包装单位 PU
黑色 / black	NW	ØA	B	ØE	ØF	T	in g	个 / Pcs
PETP-07B	07	13,2	20,4	9,2	6,0	1,0	0,8	10
PETP-10B	10	15,9	22,2	11,9	9,3	1,0	1,1	10
PETP-12B	12	18,9	25,3	14,8	11,7	1,0	1,6	10
PETP-17B	17	24,2	28,1	20,0	15,7	1,0	2,5	10
PETP-23B	23	31,6	30,9	27,0	22,0	1,0	3,7	6
PETP-29B	29	38,1	31,2	33,1	27,8	1,2	5,5	6
PETP-36B	36	45,8	37,2	40,6	35,2	1,2	8,1	4
PETP-48B	48	57,8	37,5	52,7	46,0	1,2	10,6	4
PETP-56B	56	71,5	44,5	64,6	55,3	1,5	19,3	2
PETP-70B	70	83,8	47,5	77,0	66,1	1,5	24,4	2


关于产品库存，交期，尺寸及颜色等问题请联系我们本地的经销商或客服。

Please contact our local distribution partner or our customer service regarding product availability, lead time, other sizes and colours.


产品代码 / Number code:

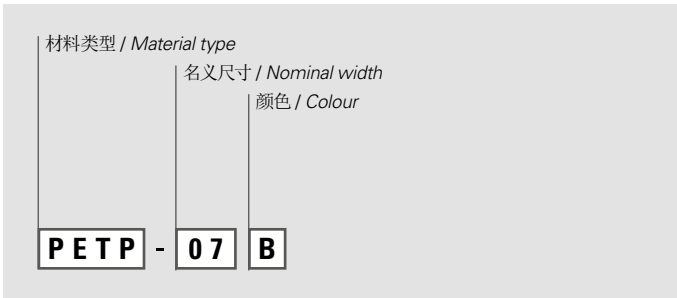

尺寸 / Dimensions:

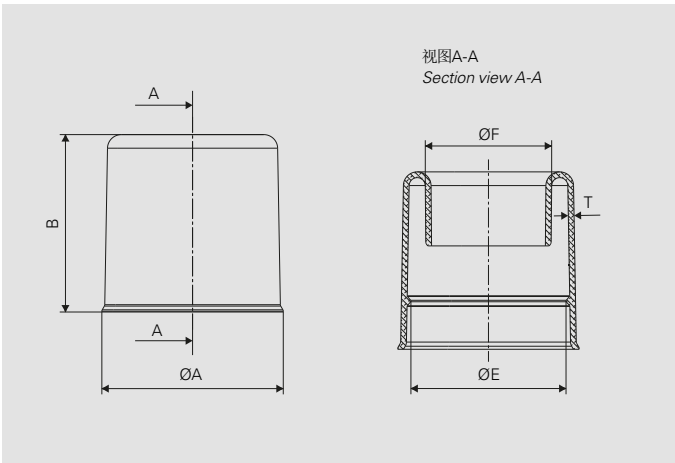

适用于 / Suitable to:

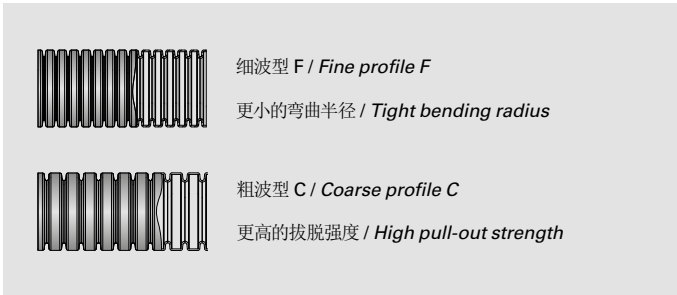

我们尽我们的知识水平所提供的数据，图像和技术规格图反映了当前的工程技术水平。这并不包含对最后应用有关的任何责任。产品用户需根据应用进行自己的评估，以确定产品是否符合特殊的应用条件。我们对产品的责任只考虑一般规定条件下的水平。FIP保留对产品数据和数值进行技术调整的权力。例如更改材料和加工工艺，在保证产品性能数值不下降的情况下不会另行通知。

The provided data, images and technical specification drawings reflect the current engineering level and are to the best of our knowledge. This does not include any liability regarding the final application. Users of the products have to make their own evaluation to determine the suitability for a specific application. Our liability for these products considers the stated level within our General Conditions only. FRAENKISCHE Industrial Pipes (FIP) reserves the right to adjust specified data and values as well as implementing technical adjustments of the products e. g. change of materials and processing technologies without prior notice as long as the specified values are not reduced.